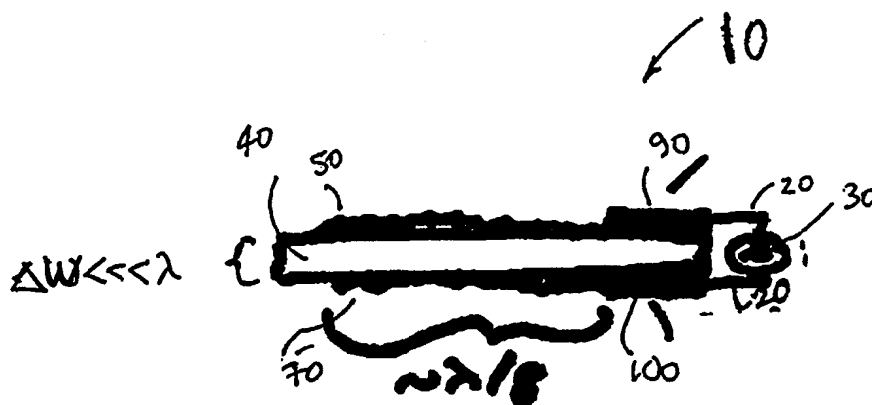




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 1/38	A1	(11) International Publication Number: WO 99/25044 (43) International Publication Date: 20 May 1999 (20.05.99)
(21) International Application Number: PCT/US98/23776 (22) International Filing Date: 6 November 1998 (06.11.98) (30) Priority Data: 08/965,914 7 November 1997 (07.11.97) US (71)(72) Applicant and Inventor: COHEN, Nathan [US/US]; 2 Ledgewood Place, Belmont, MA 02178 (US). (74) Agents: CHICKERING, Robert, B. et al.; Flehr, Hohbach, Test, Albritton & Herbert LLP, Suite 3400, 4 Embarcadero Center, San Francisco, CA 94111-4187 (US).		(81) Designated States: CA, CN, IL, JP, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: MICROSTRIP PATCH ANTENNA WITH FRACTAL STRUCTURE



(57) Abstract

A microstrip patch antenna (10) having reduced size is implemented by providing a substrate (40) having on one surface a conductive fractal pattern (50), and having on the other surface a conductive pattern (70) that may also be a fractal pattern. The fractal pattern (50) is of order $N > 1$, and if fractal patterns are formed on each substrate surface, the fractal family and fractal iteration number may be different. So fractalizing at least one conductive surface permits reduction of substrate dimension may be reduced to one-eighth wavelength.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5 **MICROSTRIP PATCH ANTENNA WITH FRACTAL STRUCTURE****RELATION TO PREVIOUSLY FILED PATENT APPLICATION**

10 This application claims priority from applicant's U.S.
patent application 08/965,914 filed 7 November 1997 entitled "MICROSTRIP PATCH ANTENNA WITH STRUCTURE".

Applicant also refers to and incorporates herein by reference applicant's pending U.S. application number
15 08/649,825 filed 17 May 1996 entitled "FRACTAL ANTENNA
GROUND COUNTERPOISE, GROUND PLANES, AND LOADING
ELEMENTS", applicant's pending patent application serial
no. 08,609,514 filed 1 March 1996 entitled "TUNING FRACTAL ANTENNAS AND FRACTAL RESONATORS", and applicant's
20 pending patent application serial no. 08/512,954 filed 9
August 1995 entitled "FRACTAL ANTENNAS AND FRACTAL RESONATORS".

FIELD OF THE INVENTION

25 The present invention relates to microstrip patch antennas and more specifically to providing such antennas with fractal structure elements.

BACKGROUND OF THE INVENTION

30 Antenna are used to radiate and/or receive typically
electromagnetic signals, preferably with antenna gain,
directivity, and efficiency. Practical antenna design
traditionally involves trade-offs between various parameters, including antenna gain, size, efficiency, and bandwidth.
35 width.

Antenna design has historically been dominated by Euclidean geometry. In such designs, the closed antenna area

is directly proportional to the antenna perimeter. For example, if one doubles the length of an Euclidean square (or "quad") antenna, the enclosed area of the antenna quadruples. Classical antenna design has dealt with
5 planes, circles, triangles, squares, ellipses, rectangles, hemispheres, paraboloids, and the like, (as well as lines).

With respect to antennas, prior art design philosophy has
10 been to pick a Euclidean geometric construction, e.g., a quad, and to explore its radiation characteristics, especially with emphasis on frequency resonance and power patterns. The unfortunate result is that antenna design has far too long concentrated on the ease of antenna
15 construction, rather than on the underlying electromagnetics.

Many prior art antennas are based upon closed-loop or island shapes. Experience has long demonstrated that
20 small sized antennas, including loops, do not work well, one reason being that radiation resistance ("R") decreases sharply when the antenna size is shortened. A small sized loop, or even a short dipole, will exhibit a radiation pattern of $1/2\lambda$ and $1/4\lambda$, respectively, if the radiation
25 resistance R is not swamped by substantially larger ohmic ("O") losses. Ohmic losses can be minimized using impedance matching networks, which can be expensive and difficult to use. But although even impedance matched small loop antennas can exhibit 50% to 85% efficiencies,
30 their bandwidth is inherently narrow, with very high Q, e.g., $Q > 50$. As used herein, Q is defined as (transmitted or received frequency)/(3 dB bandwidth).

Applicant's above-referenced co-pending patent applications depict examples of fractal geometry, which geometry
35 may be grouped into random fractals, which are also

termed chaotic or Brownian fractals and include a random noise components, or deterministic fractals.

5 In deterministic fractal geometry, a self-similar structure results from the repetition of a design or motif (or "generator"), on a series of different size scales. One well known treatise in this field is Fractals, Endlessly Repeated Geometrical Figures, by Hans Lauwerier, Princeton University Press (1991), which treatise applicant
10 refers to and incorporates herein by reference. Lauwerier notes that in its replication, the motif may be rotated, translated, scaled in dimension, or a combination of any of these characteristics. Thus, as used herein, second order of iteration or $N=2$ means the funda-
15 mental motif has been replicated, after rotation, translation, scaling (or a combination of each) into the first order iteration pattern. A higher order, e.g., $N=3$, iteration means a third fractal pattern has been generated by including yet another rotation, translation, and/or
20 scaling of the first order motif.

Unintentionally, first order fractals have been used to distort the shape of dipole and vertical antennas to increase gain, the shapes being defined as a Brownian-type of chaotic fractals. See F. Landstorfer and R.
25 Sacher, Optimisation of Wire Antennas, J. Wiley, New York (1985).

So-called microstrip patch antennas have traditionally
30 been fabricated as two spaced-apart metal surfaces separated by a small width dielectric. The sides are dimensioned typically one-quarter wavelength or one-half wavelength at the frequency of interest. One surface is typically a simple euclidean structure such as a circle,
35 a square, while the other side is a ground plane.

Attempting to reduce the physical size of such an antenna for a given frequency typically results in a poor feed-point match (e.g., to coaxial or other feed cable), poor radiation bandwidth, among other difficulties.

5

Prior art antenna design does not attempt to exploit multiple scale self-similarity of real fractals. This is hardly surprising in view of the accepted conventional wisdom that because such antennas would be anti-resonators, and/or if suitably shrunken would exhibit so small a radiation resistance R , that the substantially higher ohmic losses O would result in too low an antenna efficiency for any practical use. Further, it is probably not possible to mathematically predict such an antenna design, and high order iteration fractal antennas would be increasingly difficult to fabricate and erect, in practice.

10

15

20

Thus, the use of fractals, especially higher order fractals, in fabricating microstrip patch antennas has not been investigated in the prior art.

25

30

35

Applicant's above-noted FRACTAL ANTENNA AND FRACTAL RESONATORS patent application provided a design methodology to produce smaller-scale antennas that exhibit at least as much gain, directivity, and efficiency as larger Euclidean counterparts. Such design approach should exploit the multiple scale self-similarity of real fractals, including $N \geq 2$ iteration order fractals. Further, said application disclosed a non-Euclidean resonator whose presence in a resonating configuration can create frequencies of resonance beyond those normally presented in series and/or parallel LC configurations. Applicant's above-noted TUNING FRACTAL ANTENNAS AND FRACTAL RESONATORS patent application provided devices and methods for tuning and/or adjusting such antennas and resonators. Said application further disclosed the use

of non-Euclidean resonators whose presence in a resonating configuration could create frequencies of resonance beyond those normally presented in series and/or parallel LC configurations.

5

However, such antenna design approaches and tuning approaches should also be useable with microstrip patch antennas and elements for such antennas. Thus, there is a need for a method by which microstrip patch antennas could be made smaller without sacrificing antenna bandwidth, while preserving good feedpoint impedance matching, and while maintaining acceptable gain and frequency characteristics.

10 The present invention provides such microstrip patch antennas, and elements for such antennas.

SUMMARY OF THE INVENTION

The present invention provides a microstrip patch antenna comprising spaced-apart first and second conductive surfaces separated by a dielectric material. The dielectric material thickness preferably is substantially less than one wavelength for the frequency of interest.

20 At least one of the surfaces is fabricated to define a fractal pattern of first or higher iteration order. Overall dimensions of the surfaces may be reduced below the one-quarter to one-half wavelength commonly found in the prior art.

30

Radio frequency feedline coupling to the microstrip patch antenna may be made at a location on the antenna pattern structure, or through a conductive feedtab strip that may be fabricated along with the conductive pattern on one or both surfaces of the antenna. The resultant antenna may be sized smaller than a non-fractal counterpart (e.g., approximately one-eighth wavelength provides good perfor-

35

mance at about 900 MHz.) while preserving good, preferably 50Ω , feedpoint impedance. Further bandwidth can actually be increased, and resonant frequency lowered.

- 5 Other features and advantages of the invention will appear from the following description in which the preferred embodiments have been set forth in detail, in conjunction with the accompanying drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a sideview of a microstrip patch antenna with at least one fractal element, according to the present invention;

- 15 FIGURE 2 is a top plan view of an exemplary fractal element (a Sierpinski square gasket, including an optional feedtab, according to the present invention;

- FIGURE 3 is a top plan view of an exemplary alternative fractal element (a diffusion limited aggregate), including an optional feed pad, according to the present invention.
- 20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- 25 In overview, the present invention provides a microstrip patch antenna with at least one element whose shape, at least in part, is substantially a fractal of iteration order $N \geq 1$. The resultant antenna is smaller than its Euclidean counterpart, provides close to 50Ω termination impedance, exhibits acceptable gain, increased bandwidth, and decreased resonant frequency than its Euclidean counterpart.
- 30

- In contrast to Euclidean geometric antenna design, a fractal antenna ground counterpoise according to the present invention has a perimeter that is not directly proportional to area. For a given perimeter dimension,
- 35

the enclosed area of a multi-iteration fractal area will always be at least as small as any Euclidean area.

Using fractal geometry, the ground element has a self-similar structure resulting from the repetition of a design or motif (or "generator"), which motif is replicated using rotation, translation, and/or scaling (or any combination thereof). The fractal portion of the element has x-axis, y-axis coordinates for a next iteration N+1 defined by $x_{N+1} = f(x_N, y_N)$ and $y_{N+1} = g(x_N, y_N)$, where x_N, y_N are coordinates of a preceding iteration, and where $f(x,y)$ and $g(x,y)$ are functions defining the fractal motif and behavior.

For example, fractals of the Julia set may be represented by the form:

$$\begin{aligned} x_{N+1} &= x_N^2 - y_N^2 + a \\ y_{N+1} &= 2x_N y_N + b \end{aligned}$$

In complex notation, the above may be represented as:

$$z_{N+1} = z_N^2 + c$$

Although it is apparent that fractals can comprise a wide variety of forms for functions $f(x,y)$ and $g(x,y)$, it is the iterative nature and the direct relation between structure or morphology on different size scales that uniquely distinguish $f(x,y)$ and $g(x,y)$ from non-fractal forms. Many references including the Lauwerier treatise set forth equations appropriate for $f(x,y)$ and $g(x,y)$.

Iteration (N) is defined as the application of a fractal motif over one size scale. Thus, the repetition of a single size scale of a motif is not a fractal as that term is used herein. Multi-fractals may of course be implemented, in which a motif is changed for different iterations, but eventually at least one motif is repeated in another iteration.

Referring now to Figure 1, a microstrip patch antenna 10 according to the present invention is shown coupled by coaxial or other cable (or equivalent) 20 to a source of radio frequency 30. Antenna 10 comprises a substrate 40 whose top-to-bottom thickness is preferably substantially less than one wavelength at the frequency of interest, e.g., the radio frequency or band of radio frequencies coupled by cable 20 to antenna 10. Preferably the effective dimension of substrate is one-eighth wavelength at such frequency.

On its first surface, substrate 40 is initially covered by a conductive layer of material 50 that is etched away or otherwise removed in areas other than the desired fractal pattern (60) design, to expose the substrate. The remaining conductive trace portion defines a fractal element, according to the present invention.

Similarly on its second surface, substrate 40 is initially covered by a conductive layer of material 70 that is selectively removed so as to leave a desired pattern (80) that may also be a fractal pattern, according to the present invention. Alternatively, conductive material defining the desired patterns 60, 80 could be deposited upon substrate 40, rather than beginning fabrication with a substrate clad or otherwise having conductive surfaces, portions of which are removed.

Preferably feedtabs 90 and 100 are coupled, respectively, to edge regions of the first and second surfaces of substrate 40 to facilitate electrical radio frequency coupling between cable 20 and patterns 60 and/or 80. These feedtabs preferably are etched using the same conductive material originally found on the upper or lower surfaces of substrate 40, or may otherwise be formed using techniques known to those skilled in the relevant art. If patterns 60 and 80 are deposited rather than etched, then

feedtabs 90, 100 may be deposited at the same fabrication step.

5 Substrate 40 is a non-conductive material, and by way of example may be a silicon wafer, a rigid or a flexible plastic-like material, perhaps MylarTM material, or the non-conductive portion of a printed circuit board, paper, epoxy, among other materials. The original conductive material on the first and/or second surfaces may be de-
10 posited doped polysilicon for a semiconductor substrate 40, or copper (or other conductor) for a printed circuit board substrate.

Figure 2 is a plan view of one surface of antenna 10 (it
15 matters not which), and depicts a first iteration fractal conductive pattern, although a fractal pattern with higher than first iteration could instead be used. The pattern shown in Figure 2 is often referred to as a Sierpinski (square) gasket pattern. A margin is shown in
20 Figure 2 between the outer perimeter of the pattern and the edge of the substrate; however no such margin is required. Although Figure 2 shows inclusion of feedtab 90 or 100, radio frequency feed may be made elsewhere on the surface, for example at any point 110.

25 If the fractal pattern of Figure 2 represents one surface of antenna 10, the opposite surface need not define a fractal pattern, but may in fact do so. For example, one surface may define a fractal pattern and the opposite
30 surface may be entirely conductive, or may define on the substrate a conductive circle, etc. If the pattern on the opposite surface is also a fractal, there is no requirement that it be the same iteration fractal as is defined on the first surface, or that it be the same
35 fractal type. While common fractal families include Koch, Minkowski, Julia, diffusion limited aggregates, fractal trees, Mandelbrot, microstrip patch antennas with

fractal element(s) according to the present invention may be implemented with other fractals as well.

Figure 3 depicts a pattern 60 or 80 in which a different
5 fractal pattern is defined, a so-called diffusion limited
aggregate pattern. It is understood, however, that ac-
cording to the present invention, a great variety of
fractal patterns of first or higher iteration may be
defined on the first and/or second surface of antenna 10.
10 In Figure 3, while a feedtab 90 or 100 is shown, it is
again understood that radio frequency feed may be made
essentially anywhere on the fractal pattern, e.g., at a
point 110.

15 In one embodiment, applicant fabricated an antenna 10
having sides dimensioned to about one-eighth wavelength
for a frequency of about 900 MHz. Those skilled in the
art will readily appreciate that a microstrip patch an-
tenna dimensioned to one-eighth wavelength is substan-
20 tially smaller than prior art non-fractal microstrip
patch antennas, in which dimensions are one-quarter or
one-half wavelength in size. At 900 MHz, bandwidth was
about 5% to about 8% of nominal frequency. Gain and
matching impedance were acceptable, and indeed substan-
25 tially 50 Ω impedance is realized without the need for
impedance transforming devices.

Modifications and variations may be made to the dis-
closed embodiments without departing from the subject and
30 spirit of the invention as defined by the following
claims. It will be appreciated, for example, that the
present invention may be implemented and adjusted and
used in ways described in any of applicant's referenced
co-pending applications.

35

WHAT IS CLAIMED IS:

1. A microstrip patch antenna including:
 - a substrate having spaced-apart first and second surfaces, said substrate having a thickness substantially smaller than a wavelength at a frequency to be coupled to said antenna;
 - a conductive pattern defining a fractal of iteration order N disposed on the first surface; and
 - a conductive pattern disposed on the second surface.
2. The antenna of claim 1, wherein said pattern on said second surface defines a fractal.
3. The antenna of claim 1, wherein said fractal on said first surface is defined as a superposition over at least N=1 iterations of a fractal generator motif, an iteration being placement of said fractal generator motif upon a base figure through at least one positioning selected from the group consisting of (i) rotation, (ii) stretching, and (iii) translation.
4. The antenna of claim 3, wherein said fractal generator motif has x-axis, y-axis coordinates for a next iteration N+1 defined by $x_{N+1} = f(x_N, y_N)$ and $y_{N+1} = g(x_N, y_N)$, where x_N, y_N are coordinates for iteration N, and where $f(x,y)$ and $g(x,y)$ are functions defining said fractal generator motif.
5. The antenna of claim 3, wherein said fractal generator motif is selected from a family consisting of (i) Koch, (ii) Minkowski, (iii) Cantor, (iv) torn square, (v) Mandelbrot, (vi) Caley tree, (vii) monkey's swing, (viii) Sierpinski gasket, and (ix) Julia.
6. The antenna of claim 3, wherein said antenna has a perimeter compression parameter (PC) defined by:

$$PC = \frac{\text{full-sized antenna element length}}{\text{fractal-reduced antenna element length}}$$

where:

$$PC = A \cdot \log[N(D + C)]$$

in which A and C are constant coefficients for a given said fractal generator motif, N is an iteration number, and D is a fractal dimension given by $\log(L)/\log(r)$,

5 where L and r are one-dimensional antenna element lengths before and after fractalization, respectively.

7. The antenna of claim 1, in which said antenna is fabricated in a manner selected from the group consisting of (i) forming upon an insulator substrate a
10 conductive layer defining said fractal, (ii) forming upon a flexible insulator substrate a conductive layer defining said fractal; (iii) forming upon a semiconductor substrate a layer of conductive material to define said
15 fractal, and (iv) removing from a substrate having a surface covered with conductive material a portion of said conductive material to form said fractal.

8. The antenna of claim 1, wherein said substrate
20 is sized to less than one-quarter wavelength at a frequency of radio frequency signals to be coupled to said antenna.

9. The antenna of claim 1, wherein said substrate
25 is sized to approximately one-eighth wavelength at a frequency of radio frequency signals to be coupled to said antenna.

10. The antenna of claim 9, wherein said frequency
30 is approximately 900 MHz.

11. A method of fabricating a microstrip patch antenna, the method including the following steps:

(a) providing a substrate having spaced-apart first and second surfaces and having a substrate thickness substantially smaller than a wavelength at a frequency to be coupled to said antenna;

5 (b) disposing on the first surface of said substrate a conductive pattern defining a fractal of iteration order N formed; and

(c) disposing on the second surface of said substrate a conductive pattern.

10

12. The method of claim 11, wherein at step (c) said conductive pattern is formed so as to define a fractal.

15

13. The method of claim 11, wherein at step (b), said fractal on said first surface is defined as a superposition over at least N=1 iterations of a fractal generator motif, an iteration being placement of said fractal generator motif upon a base figure through at least one positioning selected from the group consisting of (i) rotation, (ii) stretching, and (iii) translation.

20

14. The method of claim 13, wherein said fractal generator motif has x-axis, y-axis coordinates for a next iteration N+1 defined by $x_{N+1} = f(x_N, y_N)$ and $y_{N+1} = g(x_N, y_N)$, where x_N, y_N are coordinates for iteration N, and where $f(x,y)$ and $g(x,y)$ are functions defining said fractal generator motif.

25

15. The method of claim 13, wherein said fractal generator motif is selected from a family consisting of (i) Koch, (ii) Minkowski, (iii) Cantor, (iv) torn square, (v) Mandelbrot, (vi) Caley tree, (vii) monkey's swing, (viii) Sierpinski gasket, and (ix) Julia.

30
35

16. The method of claim 13, wherein said antenna has a perimeter compression parameter (PC) defined by:

$$PC = \frac{\text{full-sized antenna element length}}{\text{fractal-reduced antenna element length}}$$

where:

$$PC = A \cdot \log[N(D + C)]$$

in which A and C are constant coefficients for a given said fractal generator motif, N is an iteration number, and D is a fractal dimension given by $\log(L)/\log(r)$,
5 where L and r are one-dimensional antenna element lengths before and after fractalization, respectively.

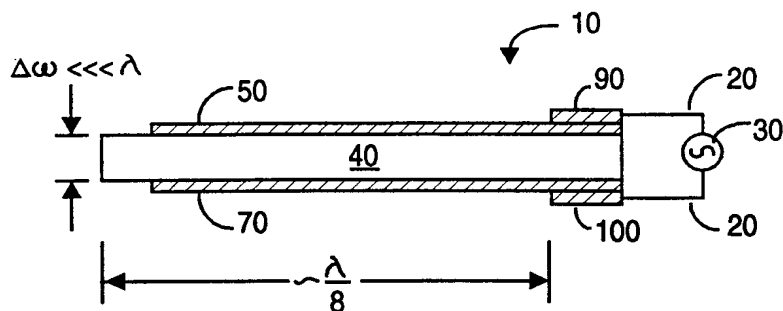
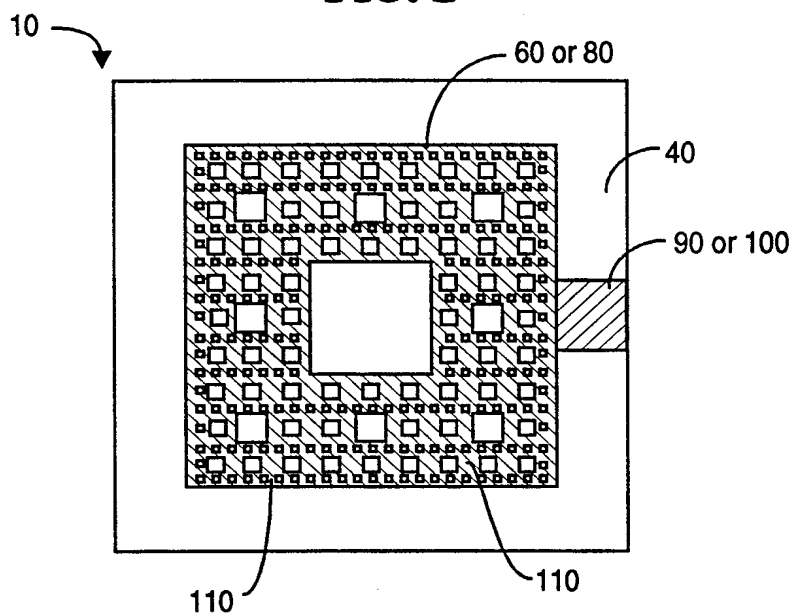
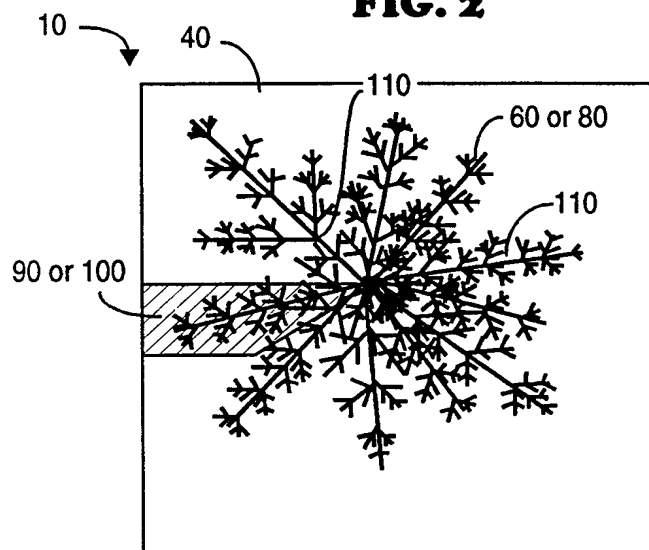
17. The method of claim 11, in which said antenna is fabricated in a manner selected from the group consisting of (i) forming upon an insulator substrate a
10 conductive layer defining said fractal, (ii) forming upon a flexible insulator substrate a conductive layer defining said fractal; (iii) forming upon a semiconductor substrate a layer of conductive material to define said
15 fractal, and (iv) providing a substrate having a surface covered with conductive material, and removing a portion of said conductive material to form said fractal.

18. The method of claim 11, wherein said substrate
20 is sized to less than one-quarter wavelength at a frequency of radio frequency signals to be coupled to said antenna.

19. The method of claim 11, wherein at step (a)
25 said substrate is sized to approximately one-eighth wavelength at a frequency of radio frequency signals to be coupled to said antenna.

20. The method of claim 19, wherein said frequency
30 is approximately 900 MHz.

1/1

**FIG. 1****FIG. 2****FIG. 3**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/23776

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H01Q 1/38

US CL : 343/700ms, 795, 806

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 343/700ms, 795, 806, 792.5, 850

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,006,858 A (SHIROSAKA) 09 April 1991 (09/04/91), see figures 3 and 4.	1,3,4,7,11,13,14, and 17
X	US 5,453,752 A (WANG et al) 26 September 1995 (26/09/95), see figures 2A-2B and 4A-5B.	1,3,4,7-11,13,14, and 17-20

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

11 JANUARY 1999

Date of mailing of the international search report

03 FEB 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

HOANGANH LE *1/11/99*
Telephone No. (703) 308-4921